



### **ALPEX A50T**

#### Digital Night Vision Scope

HIKMICRO ALPEX A50T Digital Day & Night Vision Scope can perform in all ambient light that is present. It has an advanced  $1920 \times 1080$  HD sensor and  $1024 \times 768$  OLED display, which provides full-color clarity in daytime and classic black & white viewing at night. The traditional-style 50mm Tube meets the needs of professional hunters who value traditions and seek technological superiority, ensuring an extreme detection range of up to 600 meters.

#### **Key Features**

- 1920 × 1080 High-definition sensor
- Supports Day/Night mode
- Supports audio recording
- Supports recoil-activation recording
- Supports video recording and snapshot, built-in EMMC (64 GB)
- 1024 × 768 resolution 0.39-inch OLED display
- Detection range up to 600 m
- 850 nm IR Torch

# Specification


MAIN		
MAX. RESOLUTION	1920 × 1080	
FRAME RATE	50 Hz	
LENS (FOCAL LENGTH)	50 mm	
MIN. FOCUSING DISTANCE	3 m	
FIELD OF VIEW	7.7° × 5.8°	
APERTURE	F1.2	
MAGNIFICATION	3.5×	
IR ILLUMINATOR WAVELENGTH	850 nm	
DETECTION RANGE	Day: 600 m Night: 600 m	
IMAGE DISPLAY		
DISPLAY	1024 × 768, 0.39 inch, 0LED	
IMAGE MODE	Day, Night	
EXIT PUPIL	5 mm	
EYE RELIEF	60 mm	
DIOPTER (RANGE)	-5 D to 5 D	
SYSTEM		
DIGITAL ZOOM	1x, 2x, 4x	
CAPTURE RESOLUTION	1440 × 1080	
RECORD VIDEO	On-board video recording	
STANDBY MODE	Yes	
PIP	Yes	
CAPTURE SNAPSHOT	Yes	
FREEZE ZEROING	Yes	
RECOIL-ACTIVATION RECORDING	Yes	
RECORD VIDEO RESOLUTION	1440 × 1080	
MAX. RECOIL	1000 g	
RETICLE	Yes	
AUDIO RECORDING	Yes	
WI-FI HOTSPOT	Yes, HIKMICRO Sight APP	
STORAGE	Built-in EMMC (64 GB)	


POWER SUPPLY	
BATTERY TYPE	Two rechargeable Lithium batteries (internal) and one replaceable CR123A (external)
BATTERY OPERATING TIME	12 hours continuous running (@25°C, Wi-Fi off)
BATTERY CAPACITY DISPLAY	Yes
ANTI-REVERSE BATTERY CONNECTION	Yes
OVERVOLTAGE PROTECTION	Yes
POWER SUPPLY	5 VDC/2 A, USB Type-C interface Supports QC3.0
GENERAL	
WORKING TEMPERATURE	-30°C to 55°C (-22°F to 131°F)
DIMENSION	442 mm × 78.1 mm × 83.5 mm
WEIGHT	1062 g without eyepiece and CR123A
PROTECTION LEVEL	IP67

# Available Model

### HM-TR3D-50Q/WV-A50T

# Dimension

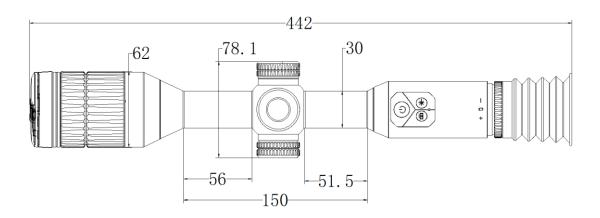



Unit: mm

### **Accessories**

